

TECHNICAL SPECIFICATIONS- GRANITE ELITE® TANKER

Transport Type/	Truck, Class C Heavy Vocational	Fan Drive:	Behr electronic modulating
Application: Engine:	13 Liter, MP8 Maxicruise 345HP (257kW), 1360lb/ft torque (1844Nm) Preheater and block heater V-MAC IV Electronics System Pedigreed Protection Plan	Electronics:	V-MAC IV engine protection system Datamax information logging system
		Air System:	Meritor/Wabco Air Dryer
		Mirrors (side):	Aerodynamic body colored
Wheel Configuration:	6x4	Lighting:	Halogen flush headlights Flasher type signal lights Body marker lights
Fuel Capacity:	Right/Left Hand – 50gal (189L), steel	Starter:	, ,
Driveline:	Meritor Heavy Duty	Starter:	12V, Gear reduction
Transmission:	Allison 4000RDS, 5-speed	Batteries (3):	Mack 12V, 2000 cold cranking amps (CCA)
		Alternator:	12V, Delco 100 Amp
Brake System:	Bendix "S" Cam ES-165 16.5x5 Cam-front, 16.5x7 Cam-rear Bendix 4S/4M ABS system	Cab Interior:	4 dome lights Dual auxiliary power outlets 3 overhead storage bins with netting
Front Axle/ Suspension:	Mack FXL12 (wide pivot center) 12,000lb (5,445kg) rating Multileaf spring suspension, axle-back position	Air Compressor/ Air Cleaner	Meritor/Wabco 318 (18.7cfm)/ 11" (28 cm) Donaldson Single element, steel
Rear Axles/ Suspension:	Mack S38R, 38,000lb (17,235kg) rating 5.04 carrier ratio Mack camelback suspension	Paint:	Chassis- urethane base coat, Mack Black Cab exterior- single color, Desert Tan
		Fuel/Water:	Fuel/water separator integrated into primary filter
Frame:	8mm x 300mm x 90mm w/ steel reinforcement section 177" (450cm) wheelbase 220" (560cm) platform	GVW:	50,000lbs (22,680kg)
		Front/Rear Tires:	Bridgestone M843– 11R22.5, 14 ply (All position)
Driver Seat:	Air, Bostrom Talladega 915 (mid-back)	Spare Tire:	Spare tire/carrier on rear of body
Passenger Seat:	Mack Fixed (mid-back)	Tank Body:	3,170gal (12,000L) fuel/water tank






- FUEL/WATER TANKER

TANK SPECIFICATIONS

- 3,170 gal (12,000 L)
- 12 gauge stainless steel construction
- Full width bumper and fender skirts
- Spare tire and carrier mounted to rear of tank
- 2 hoses with male/female adaptors

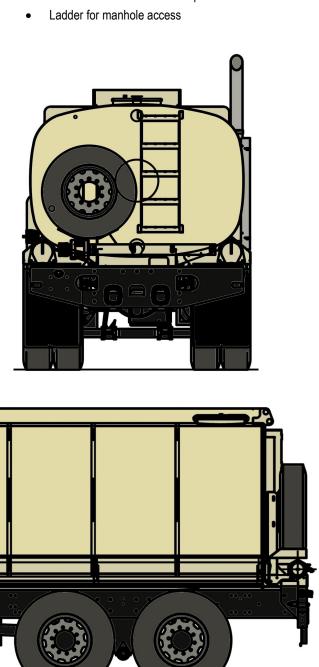

CUSTOMIZED OPTIONS AVAILABLE TO MEET MISSION REQUIREMENTS

For more information:
Mack Defense Office
2402 Lehigh Parkway South
Allentown, PA 18103
Tel: (336) 291-9301 Fax: (336) 291-9302
MackDefense@macktrucks.com

